




AYL SoundFit Speaker Grill Replacement

Replace the plastic speaker grills in the AYL SoundFit.

Written By: Taylor Shuler

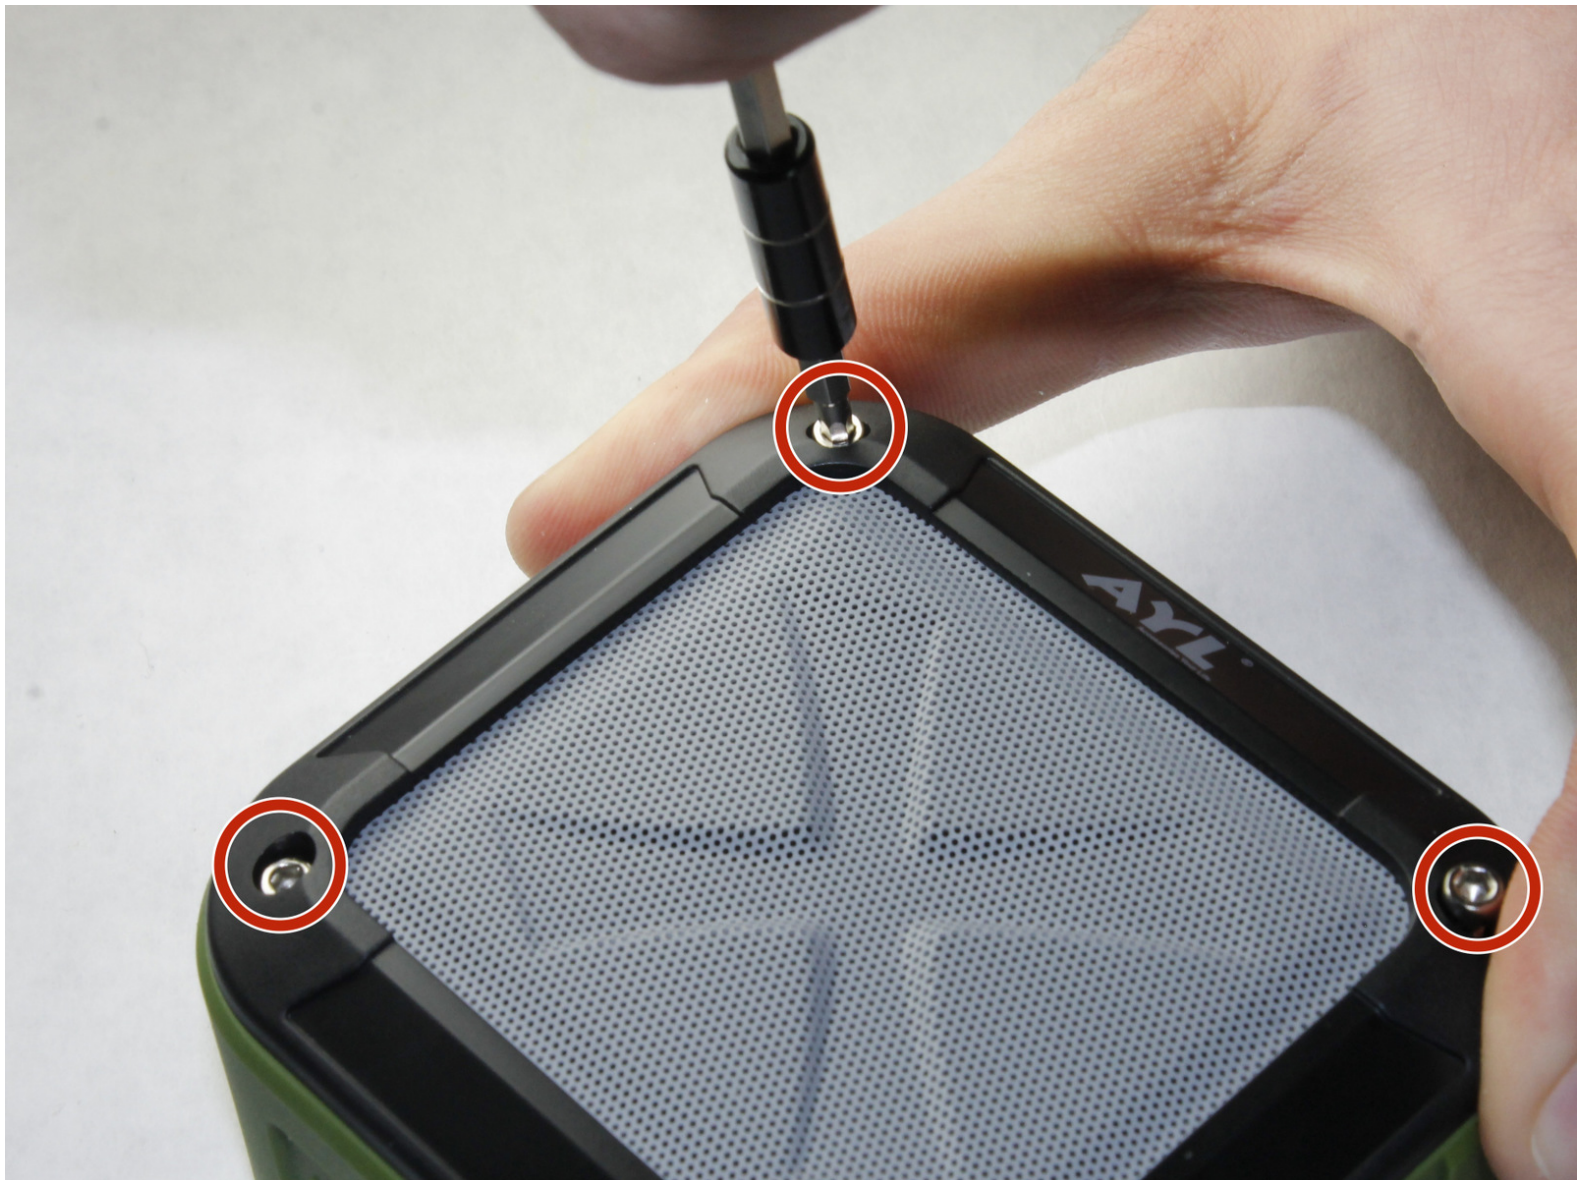


INTRODUCTION

This guide will teach you how to remove damaged speaker grills in the AYL SoundFit. With just a screwdriver, the speaker grills can be removed and replaced in a few simple steps.

TOOLS:

- [2.5 mm Hex Bit](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Speaker Grill

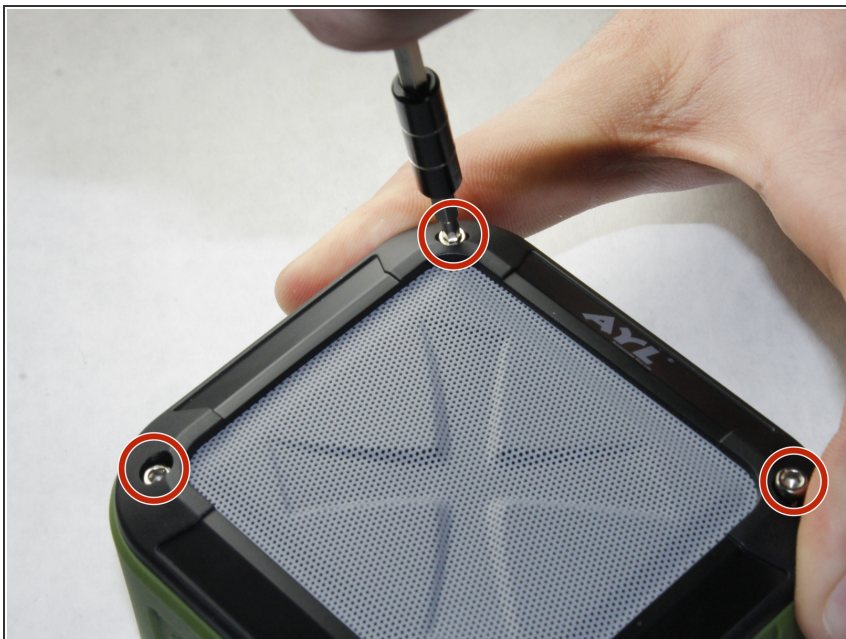


- Remove each of the 4 screws on the front cover using the 2.5mm Hex Bit in the screwdriver.

Step 2



- Remove the cover with a spudger.

Step 3

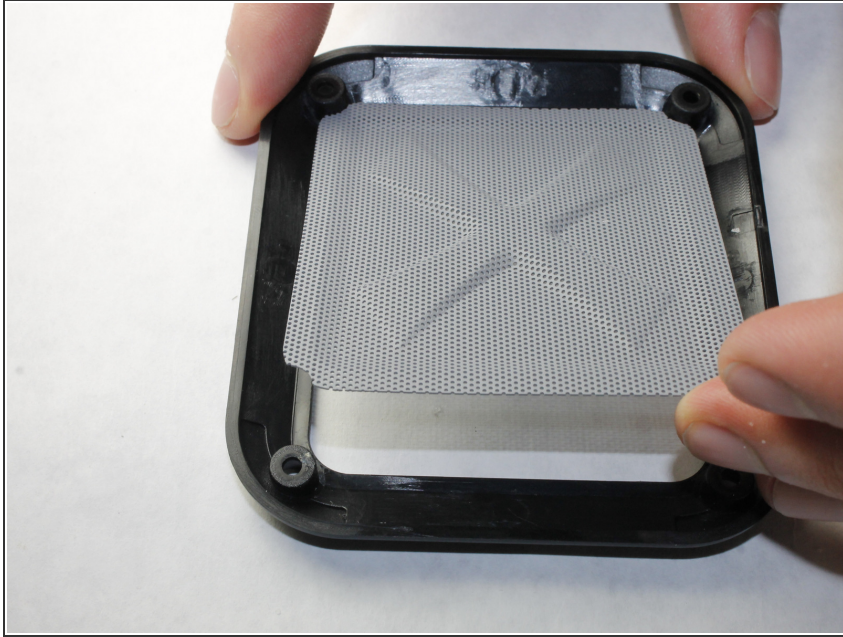

- Remove the speaker grill.
- ★ During reassembly, be sure to place the replacement grill in the same position as the original.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-17 11:33:43 PM.